



STATIC DWS SPECSHEET

- ✓ Improve data traceability
- ✓ Scan, Weight, Dimension in ONE stop
- ✓ For All object Box & Irregular

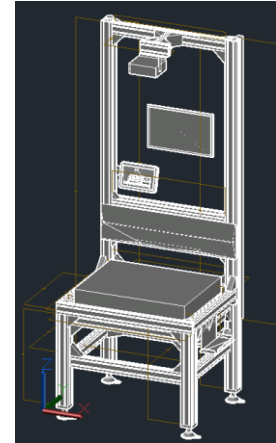

Part Number	SSG-STDDWS-20V2-LFT
Power	100 - 240Vac (1x Single Phase Power Socket UK Type)
Operating Temperature	5 – 40 °C
Display Panel	22-24inch Display Monitor
Scanner	Corded Handheld Scanner (Standard 1D barcode and 2D barcode)
Weigher Range	100g – 60kgs
Dim Min Object	L: 50mm x W: 50mm x H: 50mm
Dim Max Object	L: 800mm x W: 600mm x H: 600mm
Accuracy	Dimensioner: 5mm Weigher: 20g
Image Storage	YES
Remote Maintenance	YES
Certifications	Employs Legal For Trade (OIML Certified)
Efficiency	500 - 1200 PPH **Depending on Operator.
Weigher Platform	 800 x 600 mm
Interface	Web API, RS232, FTP Server
Typical Static DWS Dimension	L: 900mm x W: 1100mm x H: 2600mm

Your Benefits

- Less Labour, Higher Efficiency, No Human Mistakes.
- Increase sorting capacity on warehouse or logistics center.
- Cost Friendly. Customizable solution fit to customer needs.
- Economic alternative to full-automated DWS system.

Field of Applications

- Warehouse and Logistics Centre, Third Party Logistics.