



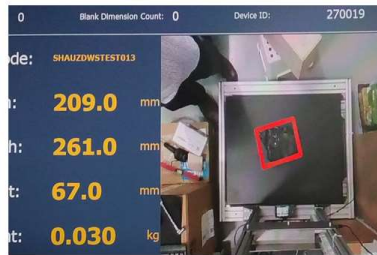
STATIC DWS SPECSHEET

- ✓ Improve data traceability
- ✓ Scan, Weight, Dimension in ONE stop
- ✓ For All object Box & Irregular

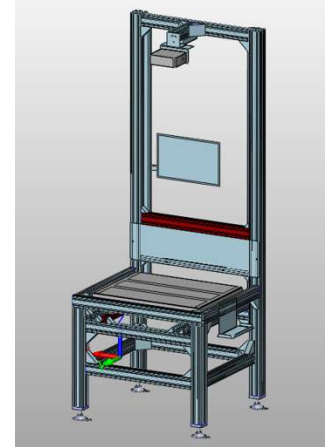


Part Number	SSG-STDDWS-20V2-LFT
Power	100 - 240Vac (1x Single Phase Power Socket UK Type) Option: as per country specify.
Operating Temperature	5 – 40 °C
Display Panel	22-24inch Display Monitor
Scanner	Corded Handheld Scanner (Standard 1D barcode and 2D barcode)
Weigher Range	10g – 60kgs
Dim Min Object	L: 50mm x W: 50mm x H: 50mm
Dim Max Object	L: 800mm x W: 600mm x H: 600mm
Accuracy	Dimensioner: Up to 5mm, Typical 10mm Weigher: 10g, up to 30kgs; 20g, from 30kgs – 60kgs
Image Storage	YES
Remote Maintenance	YES
Certifications	Employs Legal For Trade (OIML Certified)
Efficiency	500 - 1200 PPH **Depending on Operator. Recommended 750 – 1000PPH.
Weigher Platform	 800 x 600 mm
Interface	Web API, RS232, FTP Server
Typical Static DWS Dimension	L: 900mm x W: 1100mm x H: 2600mm
Ethernet Connections	RJ45 Lan Ethernet Connection Wifi Connection

Our Static DWS – USP



Parcel with black plastic wrapped, measured up to the outer part accurately

A very thin object. A4 paper.
No Problem!

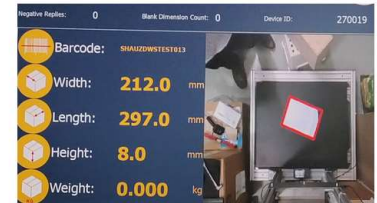

Shiny Thin flyer.
Easily measured.

Your Benefits

- Less Labour, Higher Efficiency, No Human Mistakes.
- Increase sorting capacity on warehouse or logistics center.
- Cost Friendly. Customizable solution fit to customer needs.
- Economic alternative to full-automated DWS system.

Field of Applications

- Warehouse and Logistics Centre, Third Party Logistics.

HOW TO CONTACT US



Northland Industrial Building 2
3 Woodlands Industrial Park E1,
#05-02 ,Singapore 757726



+65 6269 0185



+65 6269 0181



SALES@SENSORHAUS.COM